


3613 FULL FLOOR ILLUSTRATION (48' EAVE HEIGHT)

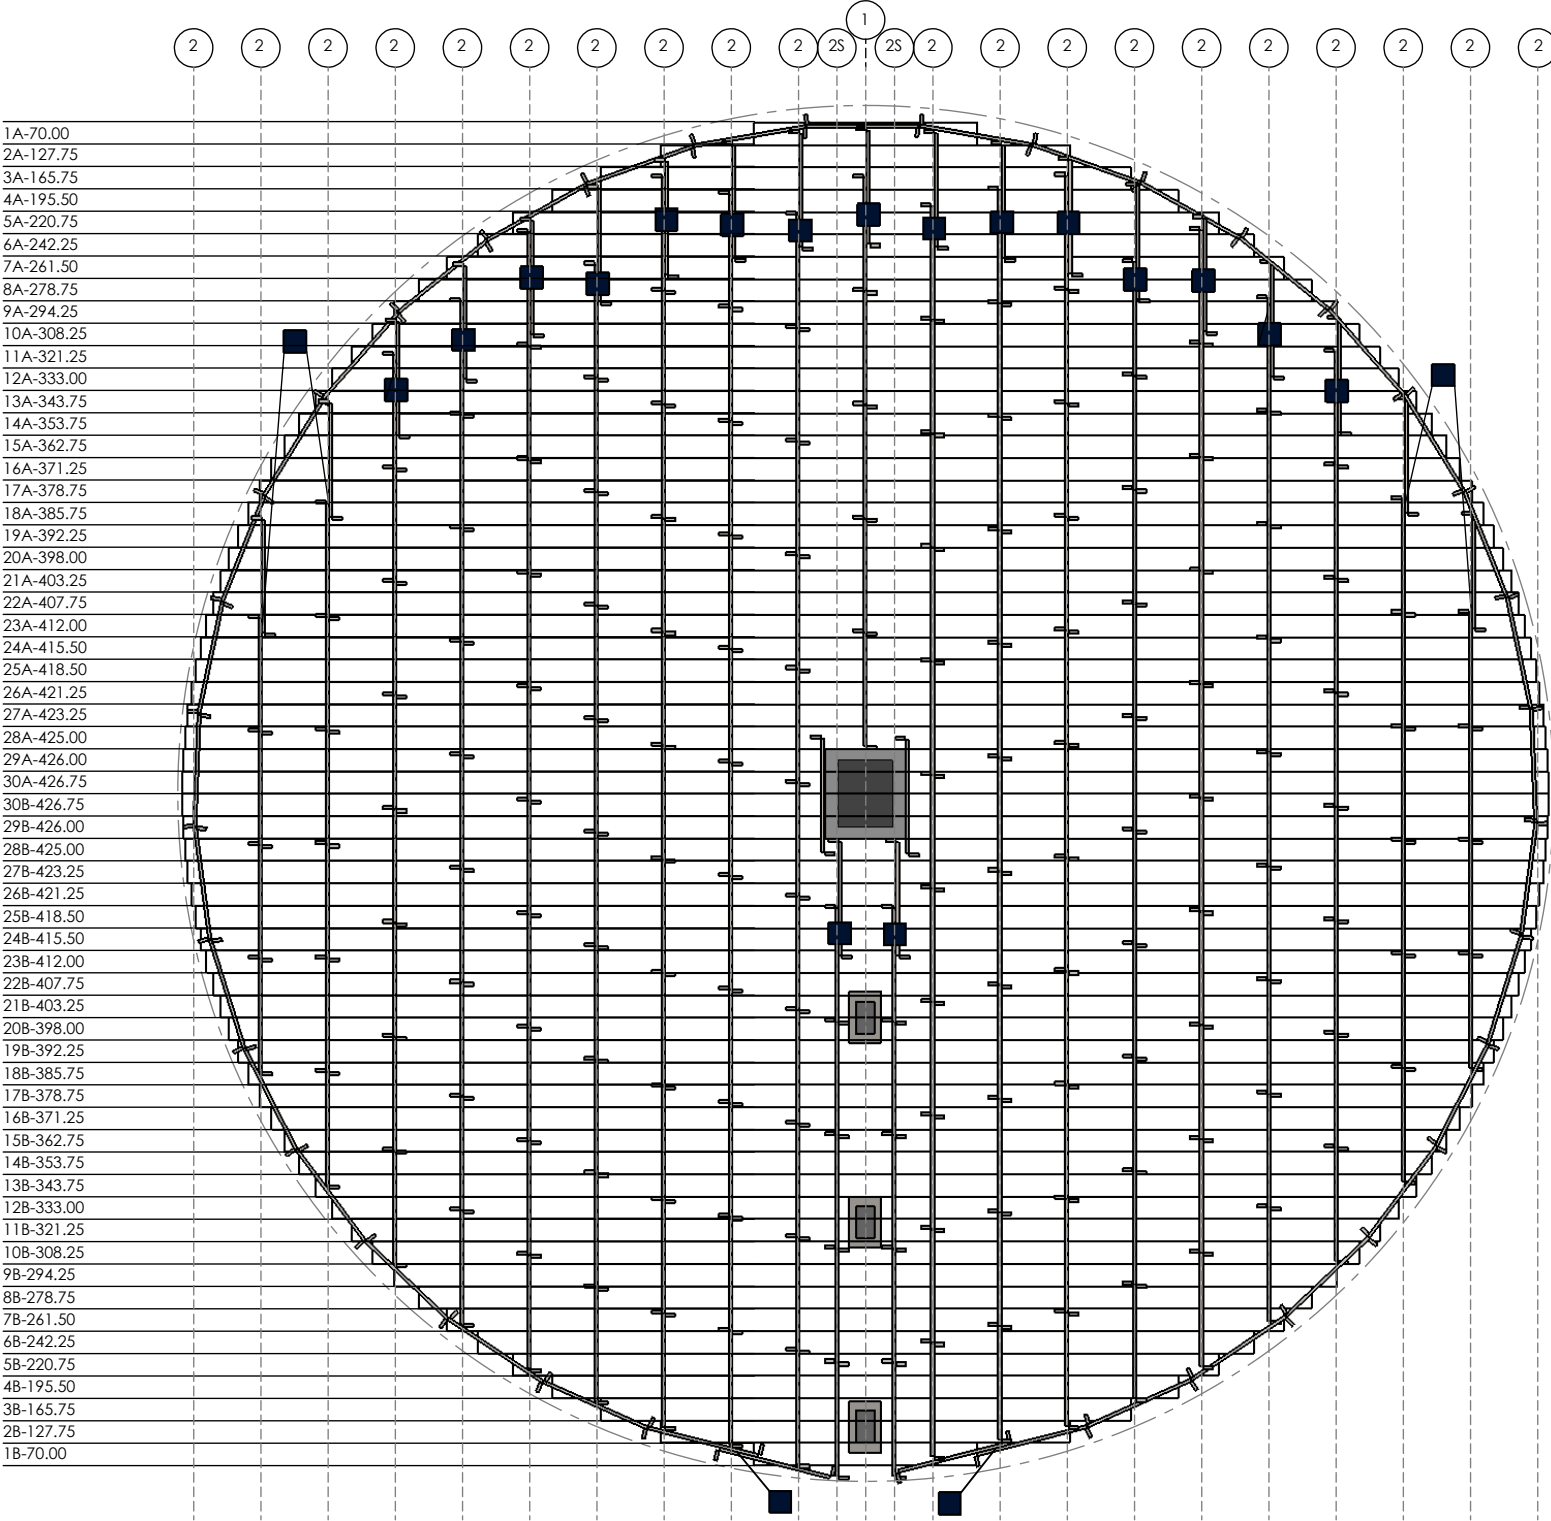

■ CLIPS PLACED AT EVERY INTERSECTION FROM ROW TO SUPPORT CIRCUMFERENCE

WARNING: DO NOT EXCEED 6" OF BOARD OVER HANG FROM SUPPORT

ITEM	DESCRIPTION
1	CENTER CHALKLINE
2	NORMAL CHALKLINE SPACING 21"
2S	INNER ROW CHALKLINE SPACING 9"
■	2 CLIPS (APPLIED AT THE TOP AND BOTTOM OF EVERY SYNTIRO INTERSECTION)

ITEMS/UNITS	TOTALS	WGT./LBS
SYNTIRO'S	237	1,873
CLIPS	140	
FLOOR LIN/FT	1664.08'	3,329
FLASHING	74	183
OVERALL WGT.		5,385