5421 FLOOR ILLUSTRATION (77' EAVE HEIGHT)

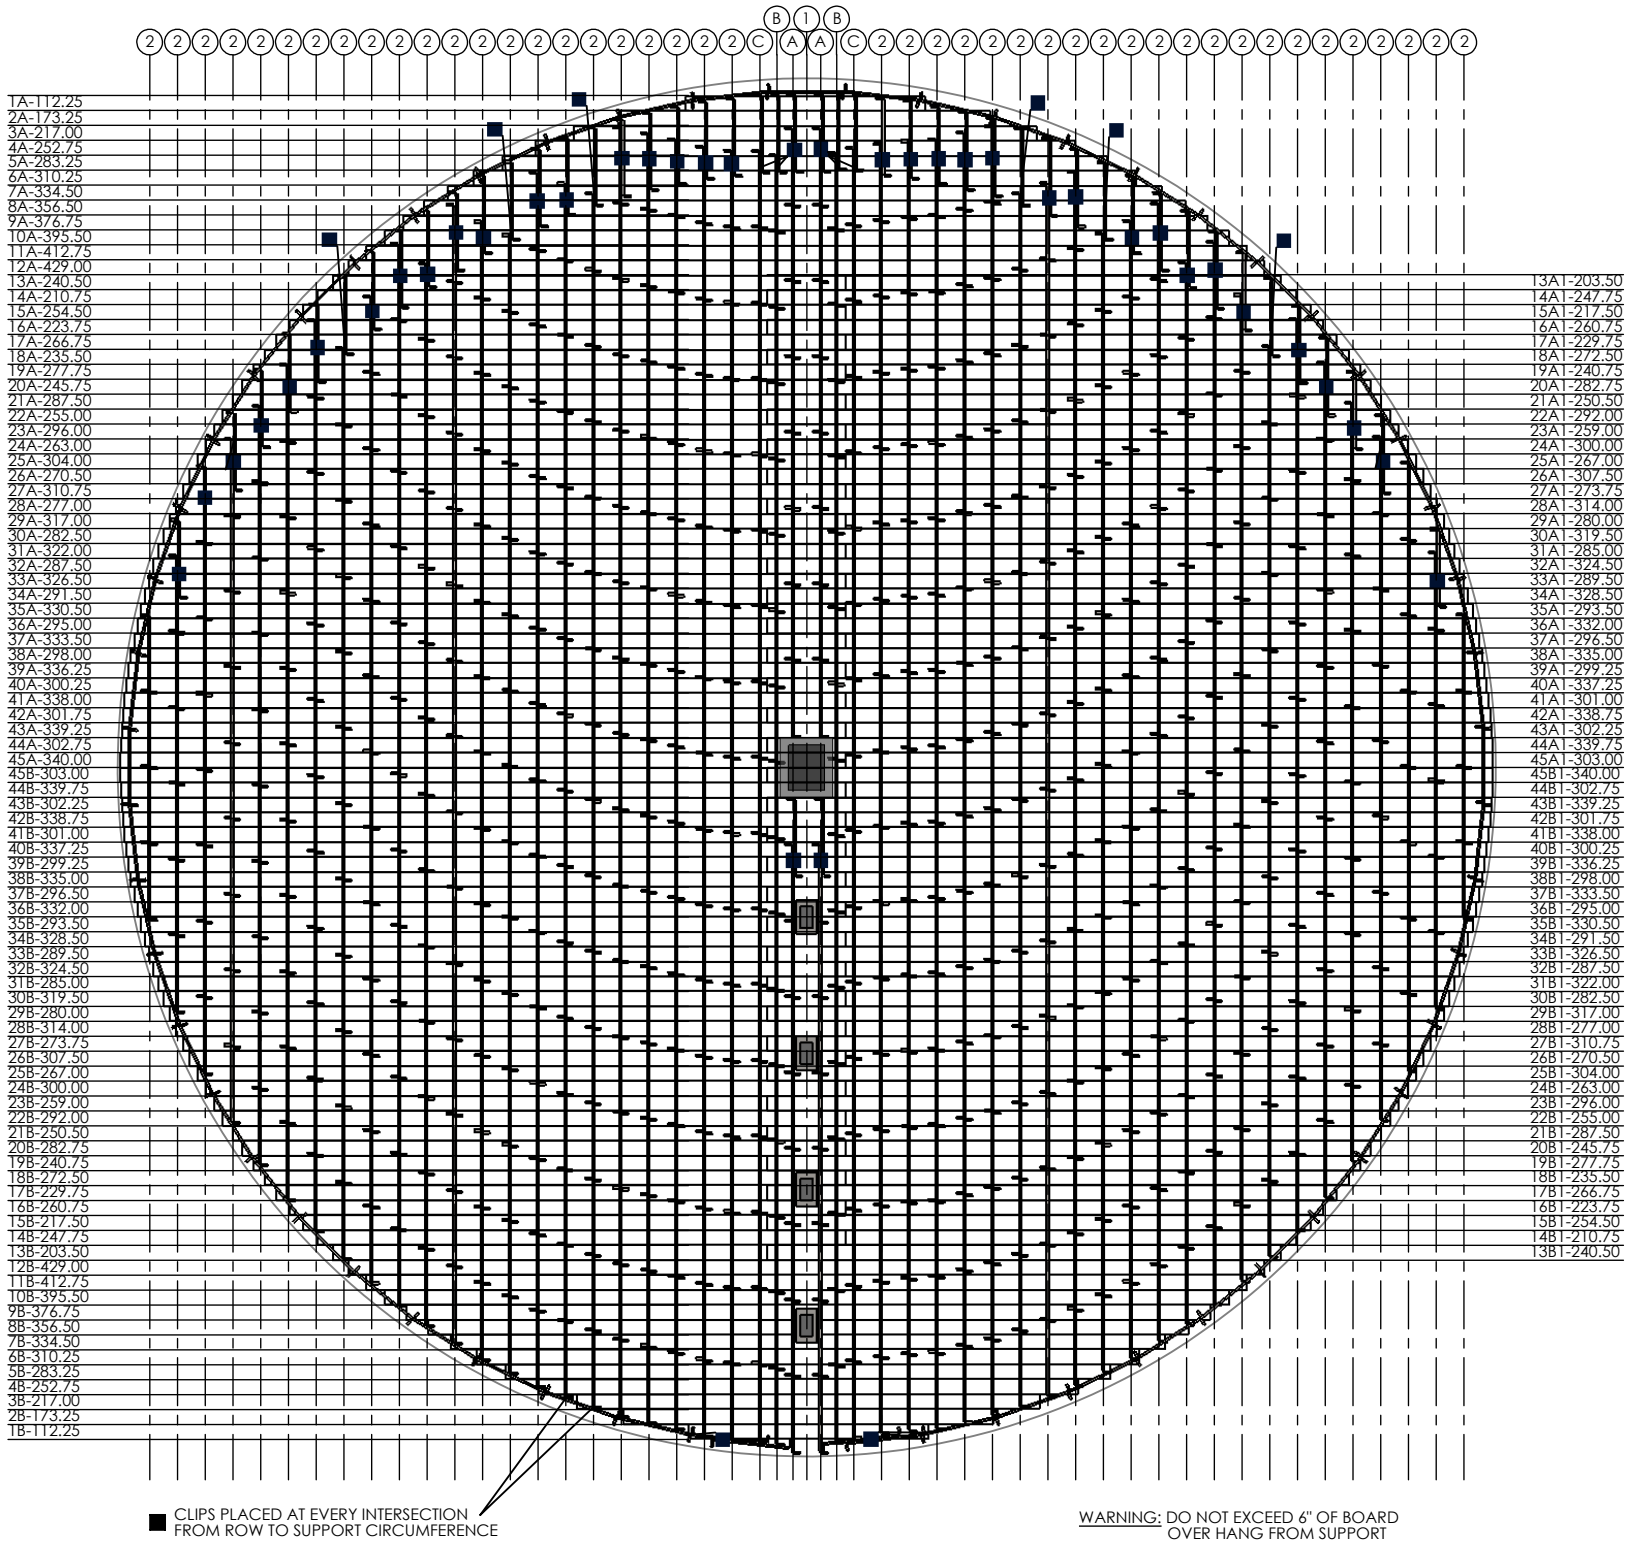

■ CLIPS PLACED AT EVERY INTERSECTION FROM ROW TO SUPPORT CIRCUMFERENCE

WARNING: DO NOT EXCEED 6" OF BOARD OVER HANG FROM SUPPORT

ITEM	DESCRIPTION
1	CENTER CHALKLINE
2	NORMAL CHALKLINE SPACING 13"
A	SPECIAL CHALKLINE SPACING (6.5" FROM CENTER)
B	SPECIAL CHALKLINE SPACING (14" FROM CENTER)
C	SPECIAL CHALKLINE SPACING (22" FROM CENTER)
■	2 CLIPS APPLIED AT THE TOP AND BOTTOM OF EVERY SUPPORT INTERSECTION

ITEMS/UNITS	TOTALS	WGT./LBS
SYNTIRO'S	753	6,001
EXTRA SPLICE ROW OF SUPPORTS	36	276
TOTAL SUPPORTS	789	6,277
CLIPS	315	

ITEMS/UNITS	TOTALS	WGT./LBS
FLOOR LIN/FT	3789.63'	7,580
FLASHING	109	270
SPLICES	132	106
OVERALL SHIP WGT. W/SUPPORTS		14,233